



CRI80

CRI 95

PANEL LED
CRI95

Modelo Model	P6P40X5B2CRI95	P6P40X5B2CRI95C	P6P40X5B2CRI95S	P6P40X5B2CRI95SP
Tipo de instalación Installation type	Desmontable Removable	Continuo/Pladur Continuous/Pladur	Superficie Surface	Suspendido Hanging
Potencia Power	40W	40W	40W	40W
Tensión de entrada Input voltage	230V	230V	230V	230V
Frecuencia Frequency	50Hz	50Hz	50Hz	50Hz
Temperatura de color Color temperature	5000K□	5000K□	5000K□	5000K□
Luminosidad nominal Lumen	5100Lm	5100Lm	5100Lm	5100Lm
Dimensiones Size	595x595x30mm	595x595x30mm	595x595x60mm	595x595x60mm
Regulable Regulable	*No (Versión regulable disponible bajo demanda)			
Ángulo Angle	150°	150°	150°	150°
IP	40	40	40	40
CRI	95			
Emergencia	*No (Versión emergencia disponible bajo demanda)			

CRI 95




P6P40X5B2CRI95



P6P40X5B2CRI95SP



CRI 95

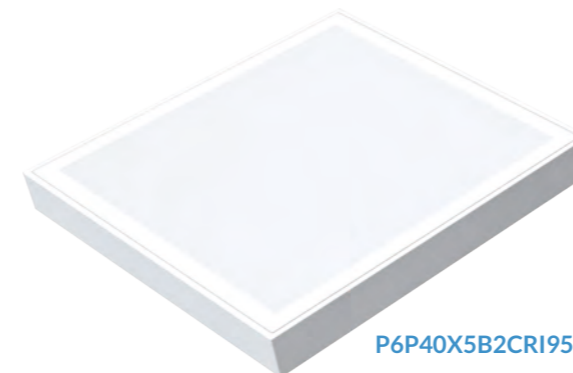

P6P40X5B2CRI95S



P6P40X5B2CRI95C

GRANDES SENSACIONES

Es complicado expresar en palabras la diferencia entre una estancia iluminada con CRI80 comparada al CRI95. Un símil podría ser el pasar de ver en blanco y negro a color. Una mayor vivacidad de los colores y un realismo prácticamente igual a la luz solar. Esencial para profesionales que trabajen con colores (impresores, textil, gráficos, diseñadores...) pero también altamente recomendable para tener una iluminación de calidad en despachos, oficinas o zonas de estudio.

PANEL
LED
CRI95

GREAT SENSATIONS

It is difficult to express in words the difference between a room illuminated with CRI80 compared to CRI95. A simile could be going from seeing in black and white to color. A greater vividness of colors and a realism practically equal to sunlight. Essential for professionals who work with colors (printers, textiles, graphics, designers ...) but also highly recommended to have quality lighting in offices, offices or study areas.



Videos demostrativos:
www.pritec.com/videos

